


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	ECR-14-008451	17Jun2014	LD	JS

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	22 AWG SOLID
	Ø RANGE in mm	0,610<=Ø<0,688
	MATERIAL	COPPER
	PLATING	BARE
ELONGATION	15% PER EN 50288-1	
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,40
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	FOIL MATERIAL	-
	BRAID MATERIAL	COPPER BRAID
OVERALL SHIELD	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
JACKET	MATERIAL	LSFRZH
	OVERALL DIAMETER (D x W)	7,8 x 16.5 mm
PULLING FORCE	MAX.	200 N

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
2. BASENR SPECIFIC PRINT LEGEND INFO:
CAT7A S/FTP XG SOLID PR04x2 AWG22 compliant to IEC 61156-7 LSFRZH
3. CABLE COLORED TYPES UPON REQUEST.

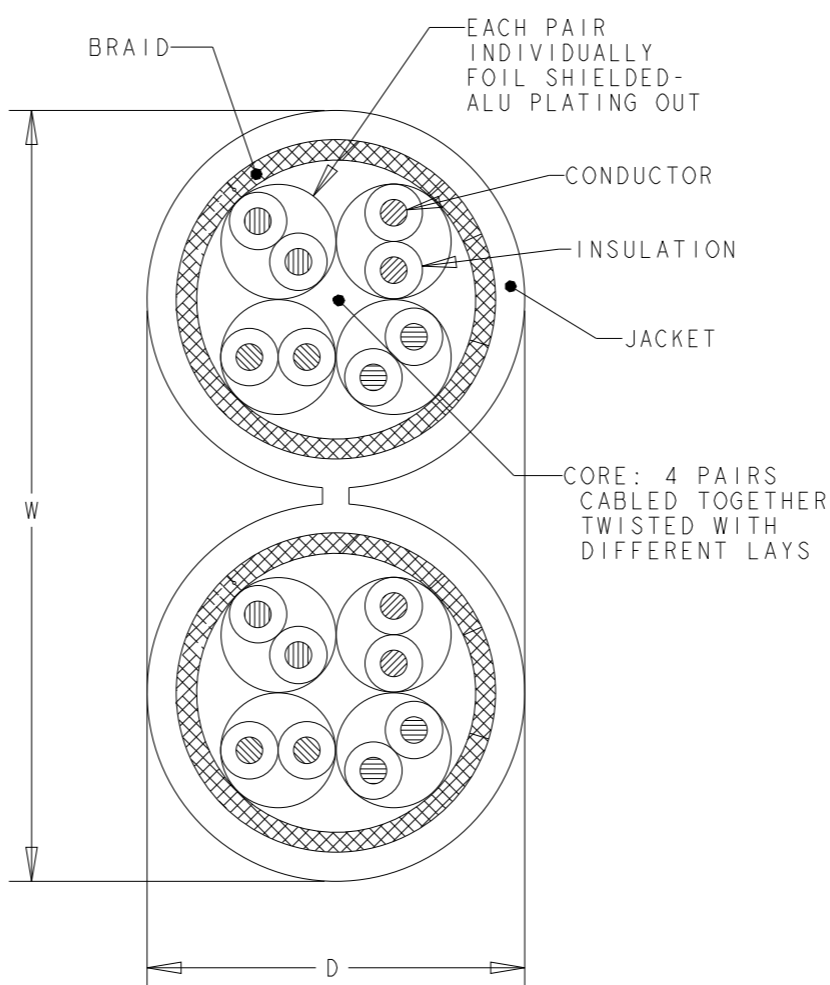

WHITE	500	REEL	1711003-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L. de Dios	13Feb13	 TE Connectivity
DIMENSIONS: mm		CHK	M. Maqueda	13Feb13	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. Sanabra	13Feb13	
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC		NAME	
MATERIAL		APPLICATION SPEC		CABLE, CAT7A, S/FTP, PiMF1200, XG, SOLID, DUAL, PR04x2, AWG22 LSFRZH	
FINISH		WEIGHT		SIZE	RESTRICTED TO
		CUSTOMER DRAWING		A3	
		SCALE		DRAWING NO	
		SHEET		1711003	
		OF		1	
		REV		F	