


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009  
 © COPYRIGHT - BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
IK	2	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A3		REVISED PER ECO-11-005150	03MAY11	RK	HMR

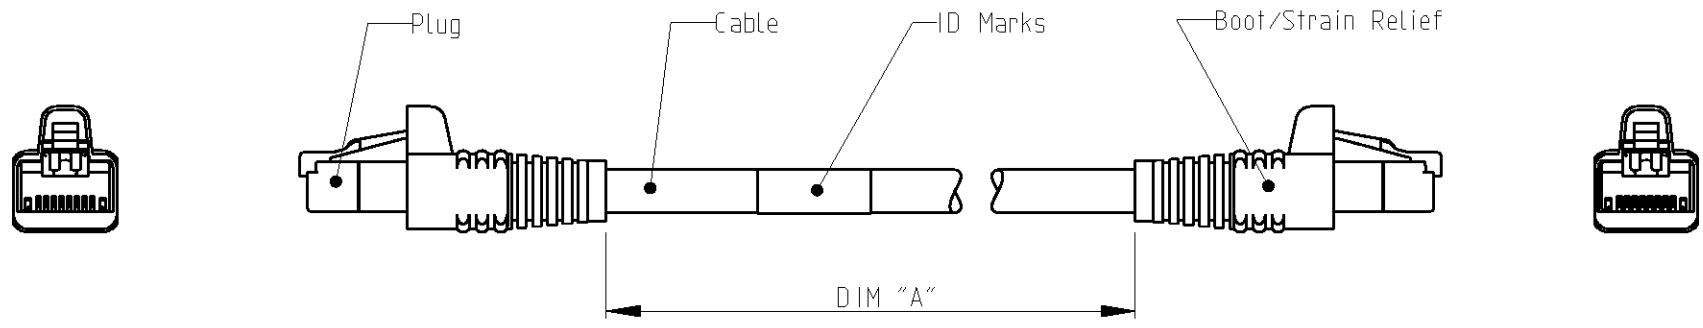

SCHEMATIC VIEW

1. RJ45 Cat 6 PATCH CABLE ASSEMBLIES ARE USED AS PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.
2. FOR AVAILABLE DASH LENGTHS, DIM A SEE THE TE CONNECTIVITY CATALOG

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		DWN J.GATNAU 03-Aug-09 CHK M.MAQUEDA 03-Aug-09 APVD J.SANABRA 03-Aug-09 PRODUCT SPEC 108-93017 APPLICATION SPEC - WEIGHT -			
MATERIAL -		FINISH -		NAME PATCH CORD RJ45 Cat 6 UTP LSZH STRANDED WHITE		RESTRICTED TO -	
CUSTOMER DRAWING				SIZE A3	CAGE CODE -	DRAWING NO C=1711091	SCALE 1:1
				SHEET 1	OF 1	REV A3	