


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009
 © COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
IK	2	A	ISSUED	26-Sep-08	JG JS	
		B	ECR-09-013427	19-Jun-09	JG JS	

- 4 PAIR AMP-TWIST PLUG PATCH CABLE ASSEMBLIES ARE USED AS A PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.
- FOR AVAILABLE DASH LENGTHS, DIM A, SEE THE TYCO ELECTRONICS CATALOGUE OR CONTACT YOUR SALES REPRESENTATIVE.

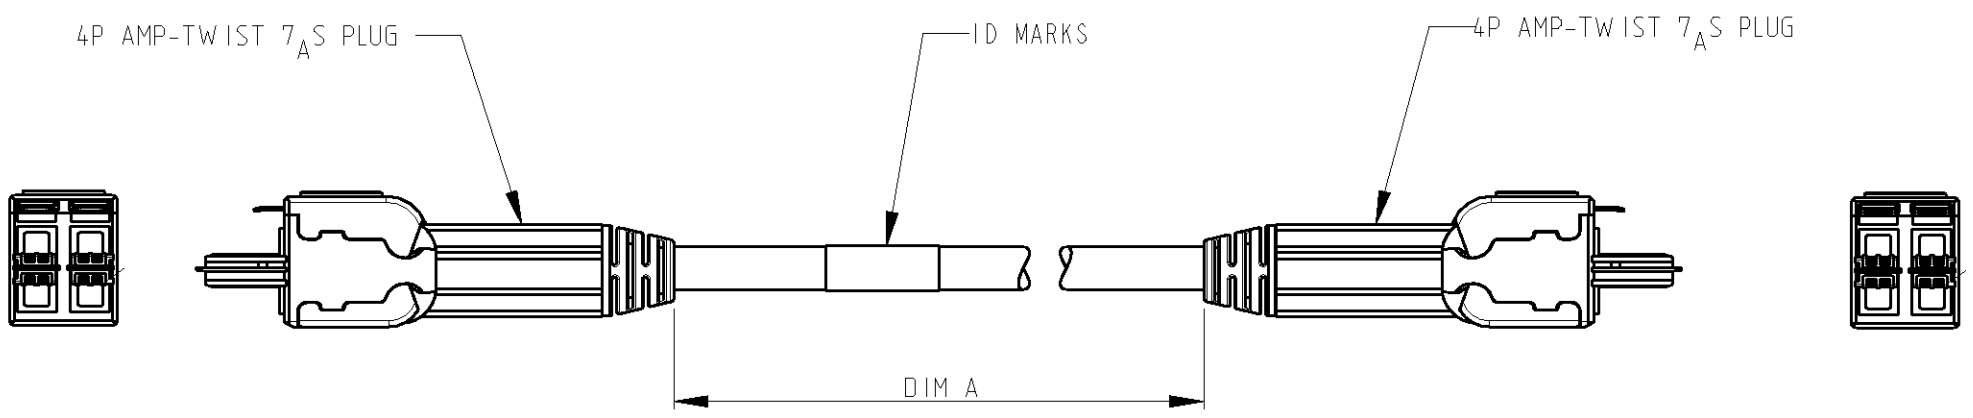

DRAWING SCHEMATIC

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN J.GATNAU 26-Sep-08 CHK M.MAQUEDA 30-Sep-08 APVD J.SANABRA 30-Sep-08	tyco Electronics AMP Spain, S.A. Barcelona, Spain.
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC 108-93020 APPLICATION SPEC -	NAME 4PR AMP-TWIST PATCH CABLE ASSEMBLY CAT 7A PiMF 1200, LSZH, STRD, WHITE
MATERIAL -	FINISH -	WEIGHT -	SIZE A3 CAGE CODE - DRAWING NO ©=1711637 RESTRICTED TO -
CUSTOMER DRAWING		SCALE -	SHEET 1 OF 1 REV B